

# Analysis of 3D Formation Pressure Based on Logging Data

Ya-Nan Sheng <sup>1\*</sup>, Zhi-Chuan Guan <sup>1</sup>, Kai Wei <sup>2</sup>, Yu-Qiang Xu <sup>1</sup> and Bo Zhang <sup>1</sup>

<sup>1</sup> School of Petroleum Engineering, China University of Petroleum (East China), Qingdao 266580, China

<sup>2</sup> School of Petroleum Engineering, Yangtze University, Wuhan 434023, China

**Key words:** Formation Pressure; Formation Matrix; Epitaxial Transfer Algorithm; 3D visualization software.

**Abstract.** A method for constructing regional 3D formation pressure based on logging data was established in this paper. It aims to deal with the problem that constructing regional 3D formation pressure in the block which is short of the seismic data or has poor quality of seismic data. To begin with, logging data and core data of drilled wells were collected. Making full use of the fine continuity and accurate resolving capability of logging data, we calculated the formation pressure of drilled wells based on the Eaton law. In addition, based on the concept of digital strata, the concept of formation matrix was put forward. What's more, formation matrix of the aimed layer group was built by making use of the drilled well formation pressure based on the epitaxial transfer algorithm. Finally, we realized the description of the regional 3D formation pressure. To verify the reliability of the method, one drilled well formation pressure was derived from the 3D formation pressure. It is compared with the pressure interpreted by the logging data. The maximum error is less than 5%. Finally, by using the visible language, the software of describing 3D formation pressure was developed. And it is conducive to drilling engineer to predict formation pressure which can provide the basis for the casing design and the selection of the drilling fluid density.

## 1 Introduction

Results of geological study on the Niudong block of Qinghai oilfield indicated that there are many folds and fault zones in the block, which made it difficult to predict the formation pressure. The vague understanding of the formation pressure caused many complex situations or drilling risks. The conventional simple one-dimensional pressure prediction result has been very difficult to meet the needs of drilling engineering. Analysis of 3D regional formation pressure should be studied in order to improve the prediction accuracy of the formation pressure. There have been many 3D formation pressure prediction methods which include logging constrained seismic inversion method, one point hypothesis and spatial interpolation algorithm [1-3]. However these methods are all based on the seismic data. If the block is lack of seismic data or the quality of seismic data is poor, the calculation

---

<sup>1\*</sup> Corresponding author: shengyanan\_upc@163.com

accuracy of 3D formation pressure based on seismic data is difficult to guarantee. With the development of block, we can obtain more and more data of the drilled wells such as logging, core data and well history information, etc. However the method for constructing the 3D formation pressure based on logging data has yet been put forward. In this paper, a new method was proposed. The spatial distribution of 3D formation pressure is more clearly understood by this method.

## 2 The algorithm of 3D formation pressure

### 2.1 Theoretical basis of the algorithm

#### 2.1.1 Formation pressure calculation model


The prediction methods of formation pressure were summarized and classified. These methods can be classified into three categories according to the order of drilling time: pressure prediction before drilling, pressure monitoring while drilling and pressure detection after drilling. They can also be divided into three categories based on different sources of data: the pressure prediction based on seismic data, the pressure monitoring by PWD and pressure detection using the logging data. Since then, many pressure calculation model had been established, such as Eaton law[4]、 Dutta law [5]and Fillippone law[6].The pressure calculation model should be chosen to fit the characteristics of geologic characteristics of the block.

The formation pressure of drilled wells was calculated by different prediction models. Then the calculated results and measured pressures were compared. Finally we found that the simple Eaton method was suitable for predicting formation pressure in this block.

#### 2.1.2 The concept of formation matrix

The digital formation is a comprehensive research system which is gradually developed with the research of the 3D digital GIS [7], geological modeling [8] and 3D visualization in drilling operations [9]. In order to realize the scientific management and application of the digital formation, this paper puts forward the concept of the formation matrix.

The formation matrix consists of the space position matrix and the geological attribute parameter matrix of the strata (as shown in Figure 1). Under the Cartesian coordinates, the formation matrix consists of four matrices:  $X, Y, Z, P$  which respectively represent x position matrix, y position matrix, z position matrix and attribute parameter matrix. The description of 3D formation pressure was transformed into the construction of formation matrix.

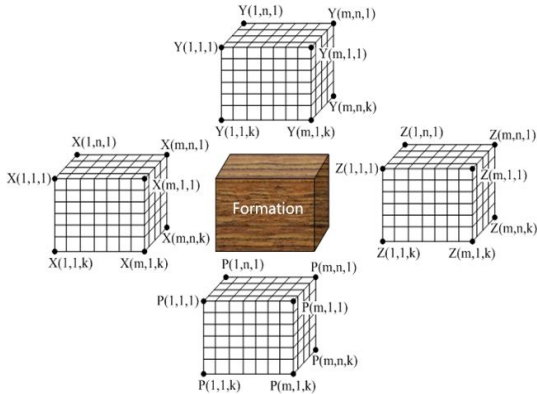

**Figure 1.** Formation matrix

## 2.2 Realization of algorithm

### 2.2.1 The deployment of virtual wells

The purpose of stratigraphic grid is to arrange the virtual wells in the block. Based on the well pattern in the plane, the X and Y directions are divided into grid number of  $N_x$ ,  $N_y$  which respectively indicate the density of virtual well pattern in the two directions. The Z directions are divided into grid number  $N_H$  which represents as the discrete point density of formation pressure along the vertical well depth. The density of virtual wells increases with the increase of the mesh numbers. And the matrix of the formation pressure increases with the increase of the density of virtual wells. The greater the formation matrix, the accuracy of 3D formation pressure is higher. Then the  $(N_x \times N_y \times N_H)$  matrix is used to represent the spatial distribution of formation. The matrix  $P(i, j, k)$  represents the pressure of a rectangular region in the formation. The pressure in the center point of the rectangle is used to represent the pressure of the rectangular region. The grid division of the target strata is shown in Figure 2.

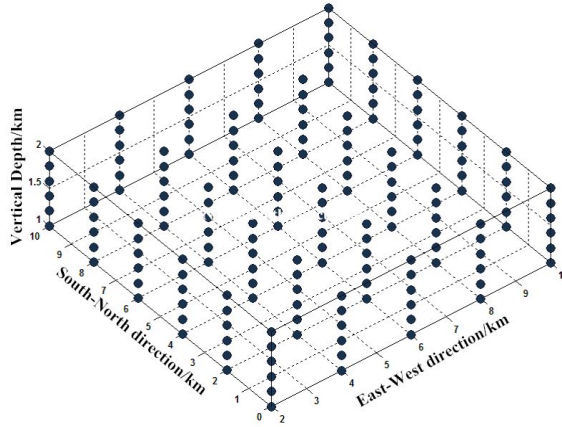


Figure 2. Gridding the target stratum

### 2.2.2 Formation pressure calculation of virtual well

Theory and practice have proved that [10] in the same geological stratum under the same deposition conditions it should produce the same interpretation results of lithology, seismic or logging. So the formation pressure of the layer group in the block is correlated. In the paper [11], based on the drilled well logging data, the epitaxial transfer algorithm was established to calculate the target well formation pressure in the same layer group.

Assuming that this block has been drilled  $N$  wells, and the location coordinates of the  $x$ -th drilled well are  $(X_x, Y_x)$ ,  $x = 1, 2, \dots, N$ . There are  $m$  discrete points of formation pressure of the  $x$ -th drilled well in the  $i$ -th layer group. The corresponding formation matrix is:

$$P_x^i = \begin{bmatrix} H_{x1}^i & p_{x1}^i \\ \vdots & \vdots \\ H_{xj}^i & p_{xj}^i \\ \vdots & \vdots \\ H_{xm}^i & p_{xm}^i \end{bmatrix} \quad (1)$$

If the location coordinates of the target of well is  $(X_o, Y_o)$ , according to epitaxial transfer algorithm the formation pressure of the x-th drilled well in the i-th layer group were transplanted to the target well:

$$\overline{P}_x^i = \left[ \left( H_{Ou}^i - \frac{H_{xu}^i (H_{xd}^i - H_{xu}^i)}{H_{xd}^i - H_{xu}^i} \right) \begin{bmatrix} 1 \\ \vdots \\ 1 \\ \vdots \\ 1 \end{bmatrix}_{m \times 1} + \frac{H_{Od}^i - H_{Ou}^i}{H_{xd}^i - H_{xu}^i} \begin{bmatrix} H_{x1}^i \\ \vdots \\ H_{xj}^i \\ \vdots \\ H_{xm}^i \end{bmatrix} \right] \frac{1}{d_x^t} \begin{bmatrix} p_{x1}^i \\ \vdots \\ p_{xj}^i \\ \vdots \\ p_{xm}^i \end{bmatrix} \quad (2)$$

Where  $d_x = \sqrt{(X_o - X_x)^2 + (Y_o - Y_x)^2}$  is the horizontal distance from point  $(X_o, Y_o)$  to point  $(X_x, Y_x)$ ,  $x = 1, 2, \dots, N$ . The t which is called the weighted exponent is a constant greater than 0.

All of the drilled well formation pressures in the i-th layer group were transplanted to the target well. Finally we got the formation pressure matrix of the target well:

$$P_o = \left[ \left( H_{Ou}^i - \frac{H_{xu}^i (H_{xd}^i - H_{xu}^i)}{H_{xd}^i - H_{xu}^i} \right) \begin{bmatrix} 1 \\ \vdots \\ 1 \\ \vdots \\ 1 \end{bmatrix}_{m \times 1} + \frac{H_{Od}^i - H_{Ou}^i}{H_{xd}^i - H_{xu}^i} \begin{bmatrix} H_{x1}^i \\ \vdots \\ H_{xj}^i \\ \vdots \\ H_{xm}^i \end{bmatrix} \right] \frac{1}{\sum_x^N d_x^t} \begin{bmatrix} \sum_x^N p_{x1}^i \\ \vdots \\ \sum_x^N p_{xj}^i \\ \vdots \\ \sum_x^N p_{xm}^i \end{bmatrix} \quad (3)$$

### 2.2.3 Construction of formation matrix

According to the method established above, the formation matrix of all of the virtual wells in the block can be set up. The space position matrix  $H3(N_x \times N_y \times N_H)$  is formed by combining the depth matrix H with the matrix X and matrix Y. By the same method, the pressure matrixes  $P$  of the virtual wells are reconstructed, and the formation pressure matrixes  $P3(N_x \times N_y \times N_H)$  are formed. Both the depth matrixes and pressure matrixes are three dimensional matrixes and the matrix size is  $N_x \times N_y \times N_H$ . The first and second column in  $N_x \times N_y \times N_H$  represent location coordinates of the virtual wells, and the third column represents the interpolation point number along with the well depth. The pressure value  $P3(i, j, k)$  indicates the formation pressure value at the space position

of  $H3(i, j, k)$  . Then the formation matrix of the target layer group can be obtained, which can realize the description of 3D formation pressure.

2.2.4 Visualization software of 3D formation pressure

Based on the above algorithm and visible language [12-15], the visualization software of building the 3D formation pressure was programmed by MATLAB. We can obtain four results through the software: ① 3D formation pressure of the target layer group in the block. ② Two-dimensional transverse distribution of formation pressure at a depth. ③ Two-dimensional longitudinal formation pressure profile of the well. ④ Formation pressure profile along the trajectory of directional well.

3 Example

In order to verify the reliability of the method and the software, this paper regarded the Niudong block of Qinghai Oilfield as the target area. There have been five drilled wells in the block. Firstly, the logging data and core data of the five drilled wells were collected. We chose N1 as the target well and the rest four wells N102, N2, N104, N1-2-10 as the drilled adjacent wells. The well deployment diagram is shown in Figure 3. The ups and downs of the target layer group are shown in Table 1.

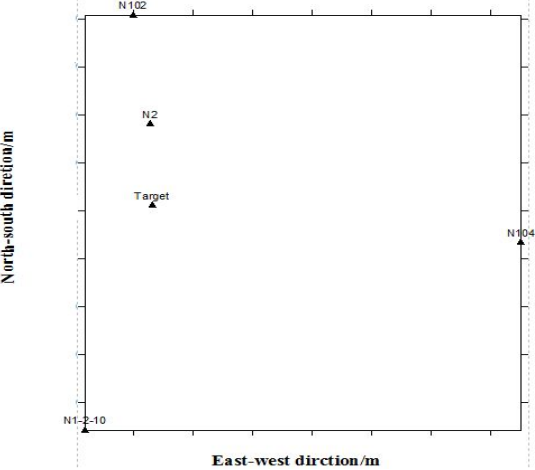


Figure 3. Adjacent wells coordinate

Table 1. The bound of the target stratum

Well	Top Depth /m	Bottom Depth /m
N102	1620	2160
N2	1600	2090
N104	1424	1928
N1-2-10	1340	1630
Target	1524	2050

Steps of constructing regional 3D formation pressure are divided into the following five parts:

① The formation pressure of the drilled wells were calculated based on the Eaton law. The results are shown in Figure 4.

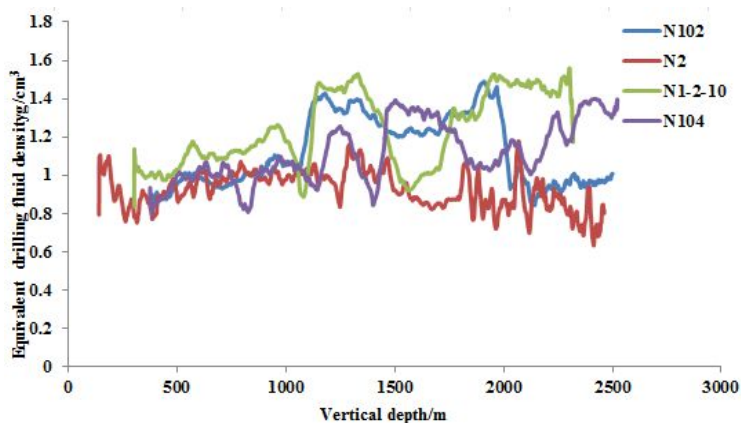


Figure 4. Pore pressure profiles of four drilled wells

## ② The deployment of virtual wells

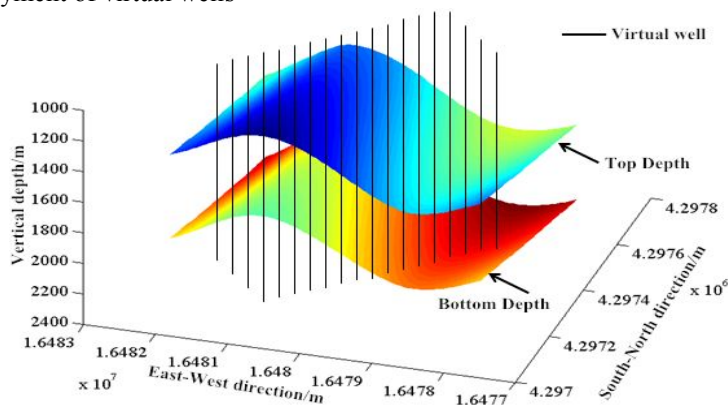


Figure 5. Virtual well deployment diagram

## ③ Formation pressure calculation of virtual well

The target well formation pressure can be gotten based on the method established above. The maximum error between the transplantation pressure with the logging test pressure is 4.2%. This shows that the algorithm proposed in this paper meets the requirements of engineering. In the same way, we can get the formation pressure of any one of the virtual wells in the block.


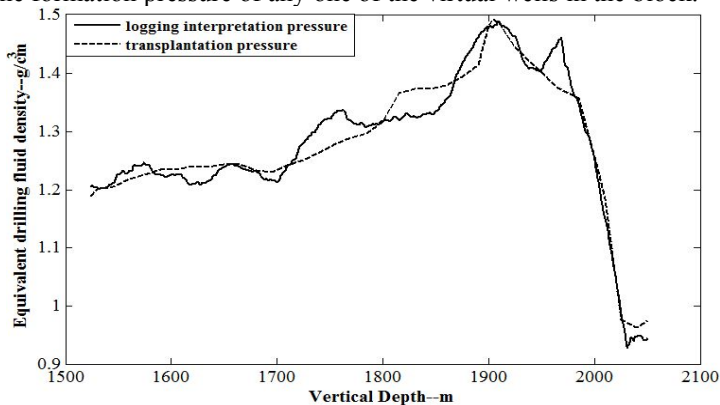



Figure 6. Comparison of transplantation pressure and logging interpretation pressure

#### ④ Visualization of 3D formation pressure

According to the software developed in this paper, the 3D formation pressure of one certain layer group was obtained. And the pressure profile along with the well depth of the target well was extracted from the 3D formation pressure. The results are shown in Figure 7 and Figure 8.

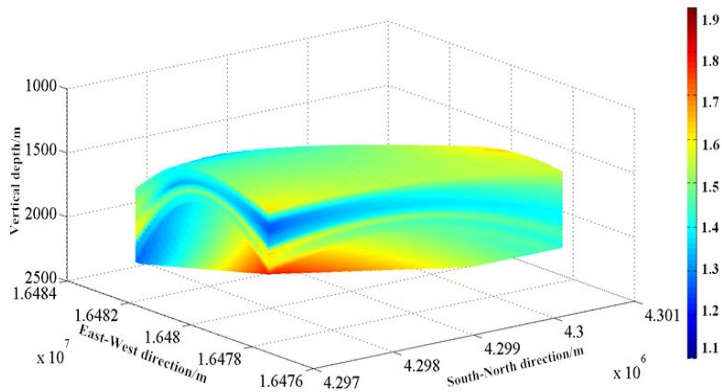

**Figure 7.** 3D formation pressure of one layer group

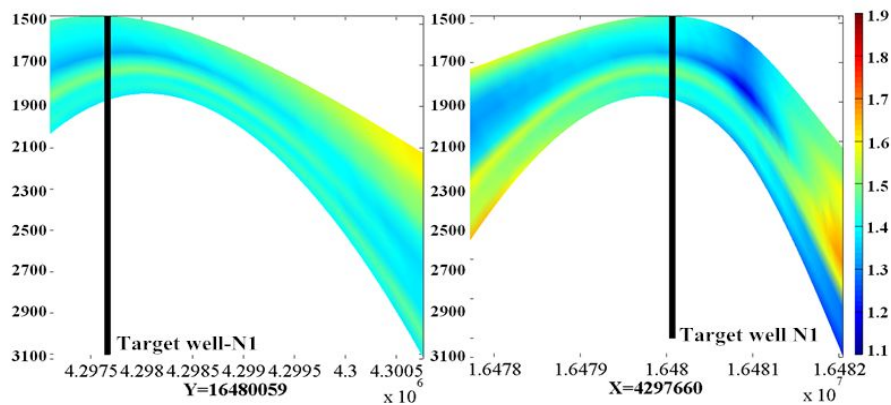

**Figure 8.** Formation pressure profile of target well

#### ⑤ Algorithm verification

In order to verify the accuracy of the calculation, the formation pressure profile of the target well was extracted from the 3D formation pressure. Then we compared it with the result of logging interpretation pressure. The results are shown in Table 2. The maximum error is less than 5%. The accuracy of this method can meet the engineering requirement. We can obtain more accurate space distribution of regional formation pressure by this method. This is conducive to drilling engineer to predict pore pressure which can provide the basis for the casing design and the selection of the drilling fluid density.

**Table 2.** Verification of the algorithm

Depth(m)	transplantation pressure(g/cm <sup>3</sup> )	logging interpretation pressure(g/cm <sup>3</sup> )	error
1550	1.22	1.24	1.6%
1700	1.24	1.19	4.2%
1800	1.30	1.26	3.2%
1900	1.51	1.49	1.3%
2000	1.15	1.2	4.1%

## 4 Conclusions

(1)The concept of formation matrix was put forward. The description of 3D formation pressure was transformed into the construction of formation matrix. A method for constructing regional formation pressure based on the drilled wells logging data was established. The 3D formation pressure was constructed layer by layer by using this method.

(2)The visualization software of 3D formation pressure was programmed. By this software, the regional formation pressure can be displayed layer by layer, rotated or displayed in arbitrary cutting section, etc. This is conducive to drilling engineer to predict pore pressure which can provide the basis for the casing design and the selection of the drilling fluid density.

## Reference

1. Chen Xueguo. Technology and Applications of 3D Formation Pressure Prediction. Petroleum Drilling Techniques, 2005,33(3):13-15.
2. Fan Honghai, Ye Zhi, Ji Rongyi,etc. Investigation on Three-Dimensional Overburden Pressure Calculation Method. Chinese Journal of Rock Mechanics and Engineering, 2011 , 30(2) : 3878-3883.
3. Ye Zhi, Fan Honghai, Zhang GuoBing, etc. Calculation Method and Distribution of Three-Dimensional Pore Pressure in Changshaling Structural Belt. Oil Drilling & Production Technology, 2013(1): 51-55.
4. Eaton B A.Graphical Method predicts geopressure worldwide.[J]World Oil,1972,51-56.
5. Dutta N C.Deepwater geohazard perdition using prestack in version pf large offset P wave data and rock model[J].Leading edge geophys.2002,21(2):193-198.
6. Fillippone W R.On the prediction of abnormally pressured sedimentary rocks from seismic data. OTC.1979.
7. ZHANG Ji-xian.LIU Jian,Li De-ren. Technical approach to realistic terrain generation[J].Journal of Image and Graphics,1997(8/9):638-645.
8. Wu Q, Xu H, Zou X. An effective method for 3D geological modeling with multi-source data integration [J]. Computers & Geosciences, 2005, 31(1):35-43.
9. J.Victor. Taking advantage of 3-dimensional visualization in drilling operations. IADC/SPE 37591.
10. O.Catuneanu. Principles of sequence stratigraphy [M]. WuYinye translated. Beijing: Petroleum Industry Press 2009.
11. Guan Zhichuan, Wei Kai. A new method for establishing regional formation pressure profile based on drilled wells data.[J] Journal of China University of Petroleum,2013,05:71-75.
12. Xiong Zu-qiang. Study on the technology of 3D engineering geological modeling and visualization.Wuhan:The Chinese Academy of Sciences(Institute of Rock&Soil Mechanics),2007.
13. Guan Zhichuan, Wei Kai. Establishing the formation pressure profile of predrill well based on adjacent wells data [J]. Journal of China University of Petroleum. 2013, 37(5): 71-75.
14. J.Victor. Taking advantage of 3-dimensional visualization in drilling operations. IADC/SPE 37591.
15. Sanstrom W.C.,Hawkins M.J.. Perceiving drilling learning through visualization. IADC/SPE 62759.